www.everlastcomposites.com

for better today & tomorrow™

EVERLAST Composites Pvt. Ltd.

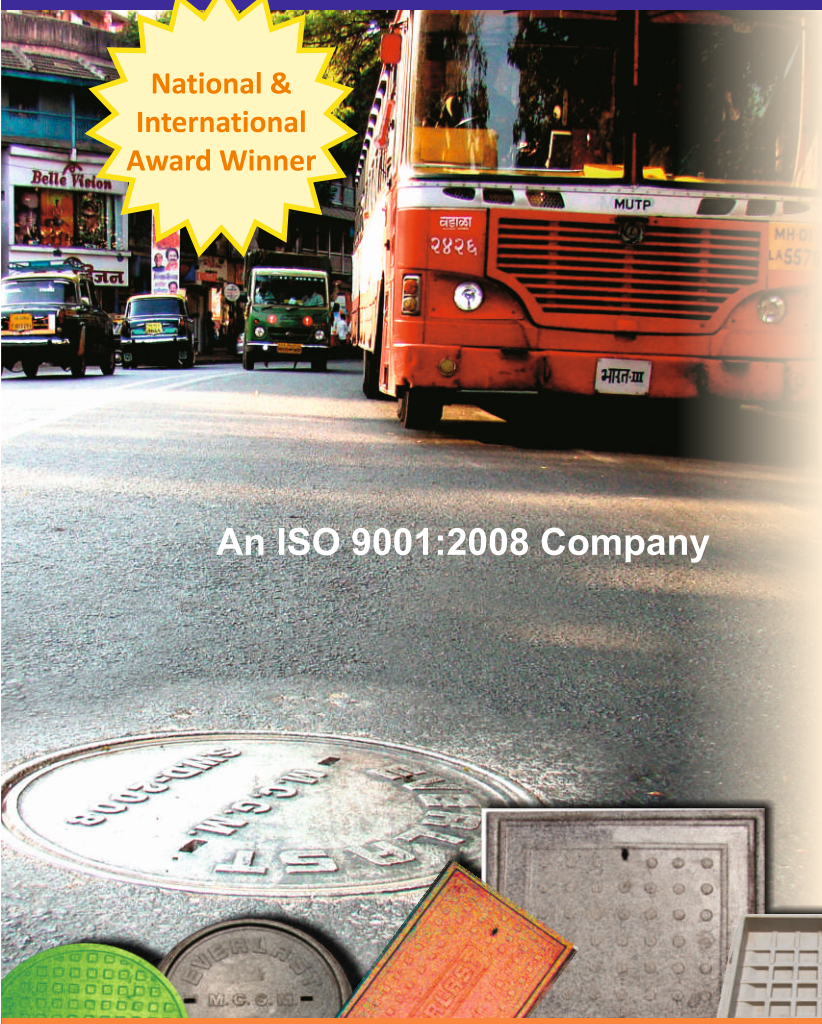

Why EVERLAST?

It has its own advantages over traditional materials:

- Waterproof, Weatherproof & Non-Corrosive
- Burglarproof
- ZERO SCRAP VALUE
- High strength to weight ratio
- Light weight - ease of handling
- Various options of decorative surface designs & granite finishes
- Life span of 30+ years
- Can be designed to take load from 1.5 ton to 40 ton
- Load designation conforming to IS 1726:1991 are 2.5,10, 20 & 35 ton & EN -124 are 1.5, 12.5, 25 & 40 ton
- Logo embossing options available
- Approved by Government & Semi Government agencies like MCGM, MES (Navy) & MTNL

GRP/FRP/Composite Manhole Covers & Gratings



▪ Zero Scrap Value ▪ Weatherproof ▪ Heavy Duty ▪ Light Weight ▪ Decorative ▪ Burglarproof

Range of Products

info@everlastcomposites.com

Manhole covers Circular	Manhole covers Square/Rectangular	Pot Type Square/Circular	Gratings
	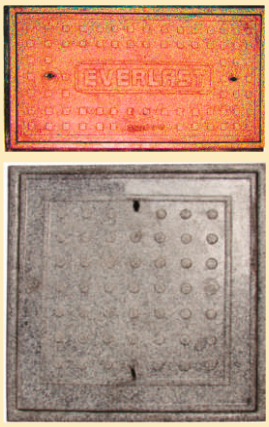		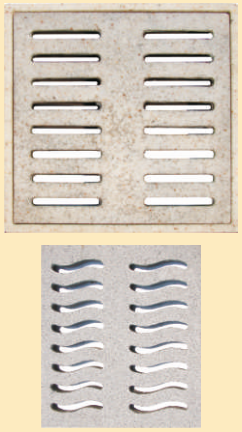

Manhole Covers & Frames, Gratings confirming to EN124:1994 and IS1726:1991 are available in following clear opening sizes(in mm) for load capacities from 1.5 Ton to 40 Ton.:

Circular	Dia 530	Dia 560	Dia 600	Dia 750	Dia 900
Square	300 x 300	450 x 450	600 x 900	900 x 900	1000 x 1000
Rectangular	450 x 600	450 x 900	450 x 900	900 x 1200	
Gratings with Frame	450 x 450	500 x 600	600 x 600	600 x 1200	
Gratings without Frame	295 x 525	375 x 500	450 x 450	500 x 550	

Dia 600mm Water Tight Underground Tank Covers available for load capacities from 5 Ton to 40 Ton.
Overhead Tank Covers are also available in Dia 450mm, Dia 530mm and Dia 600mm.

Shade Card*

Note: Can be designed and manufactured as per your requirements.



* Actual colours may vary from visual representation

Size Selection & Installation

Size Selection: Clear opening of the frame should not be smaller than that of chamber.

Installation Procedure

a) Prepare concrete bed considering height of frame

b) Frame should be embedded in 300 x 200 mm of minimum M-20 grade concrete

c) Make sure that top level of frame should match with the road

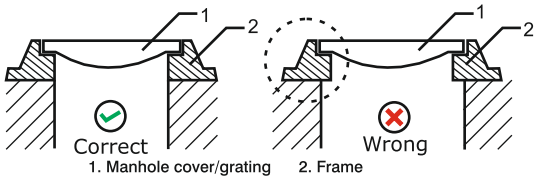

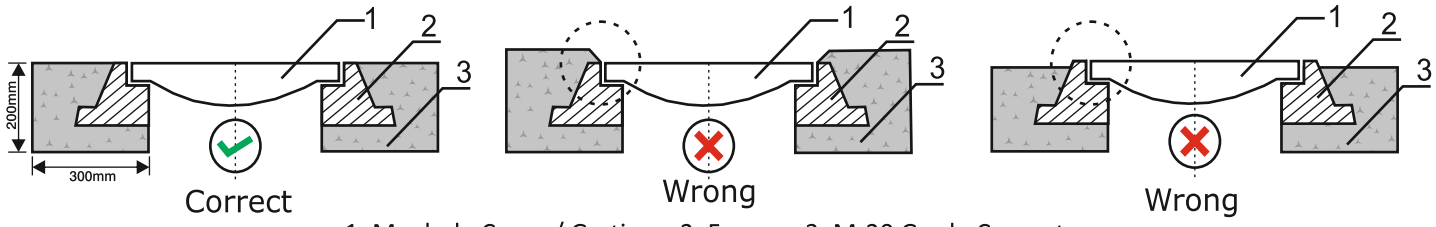

1. Manhole Cover / Grating 2. Frame 3. M-20 Grade Concrete

EVERLAST Composites Pvt. Ltd.

Everlast Composites Pvt. Ltd.
123, Blue Rose Ind. Est., Western Exp. Highway,
Borivali (East), Mumbai - 400 066.
info@everlastcomposites.com web: www.everlastcomposites.com
Tel.: +91 - 22 - 28704407/32939914, Telefax: +91 - 22 - 28704408

designed & Printed by oriongraphica@yahoo.com Cell: +91 98671 65344